




Special Application Trucks & Pumps | Since 1976

MTBP - 16

MTBP – TELESCOPIC Platform

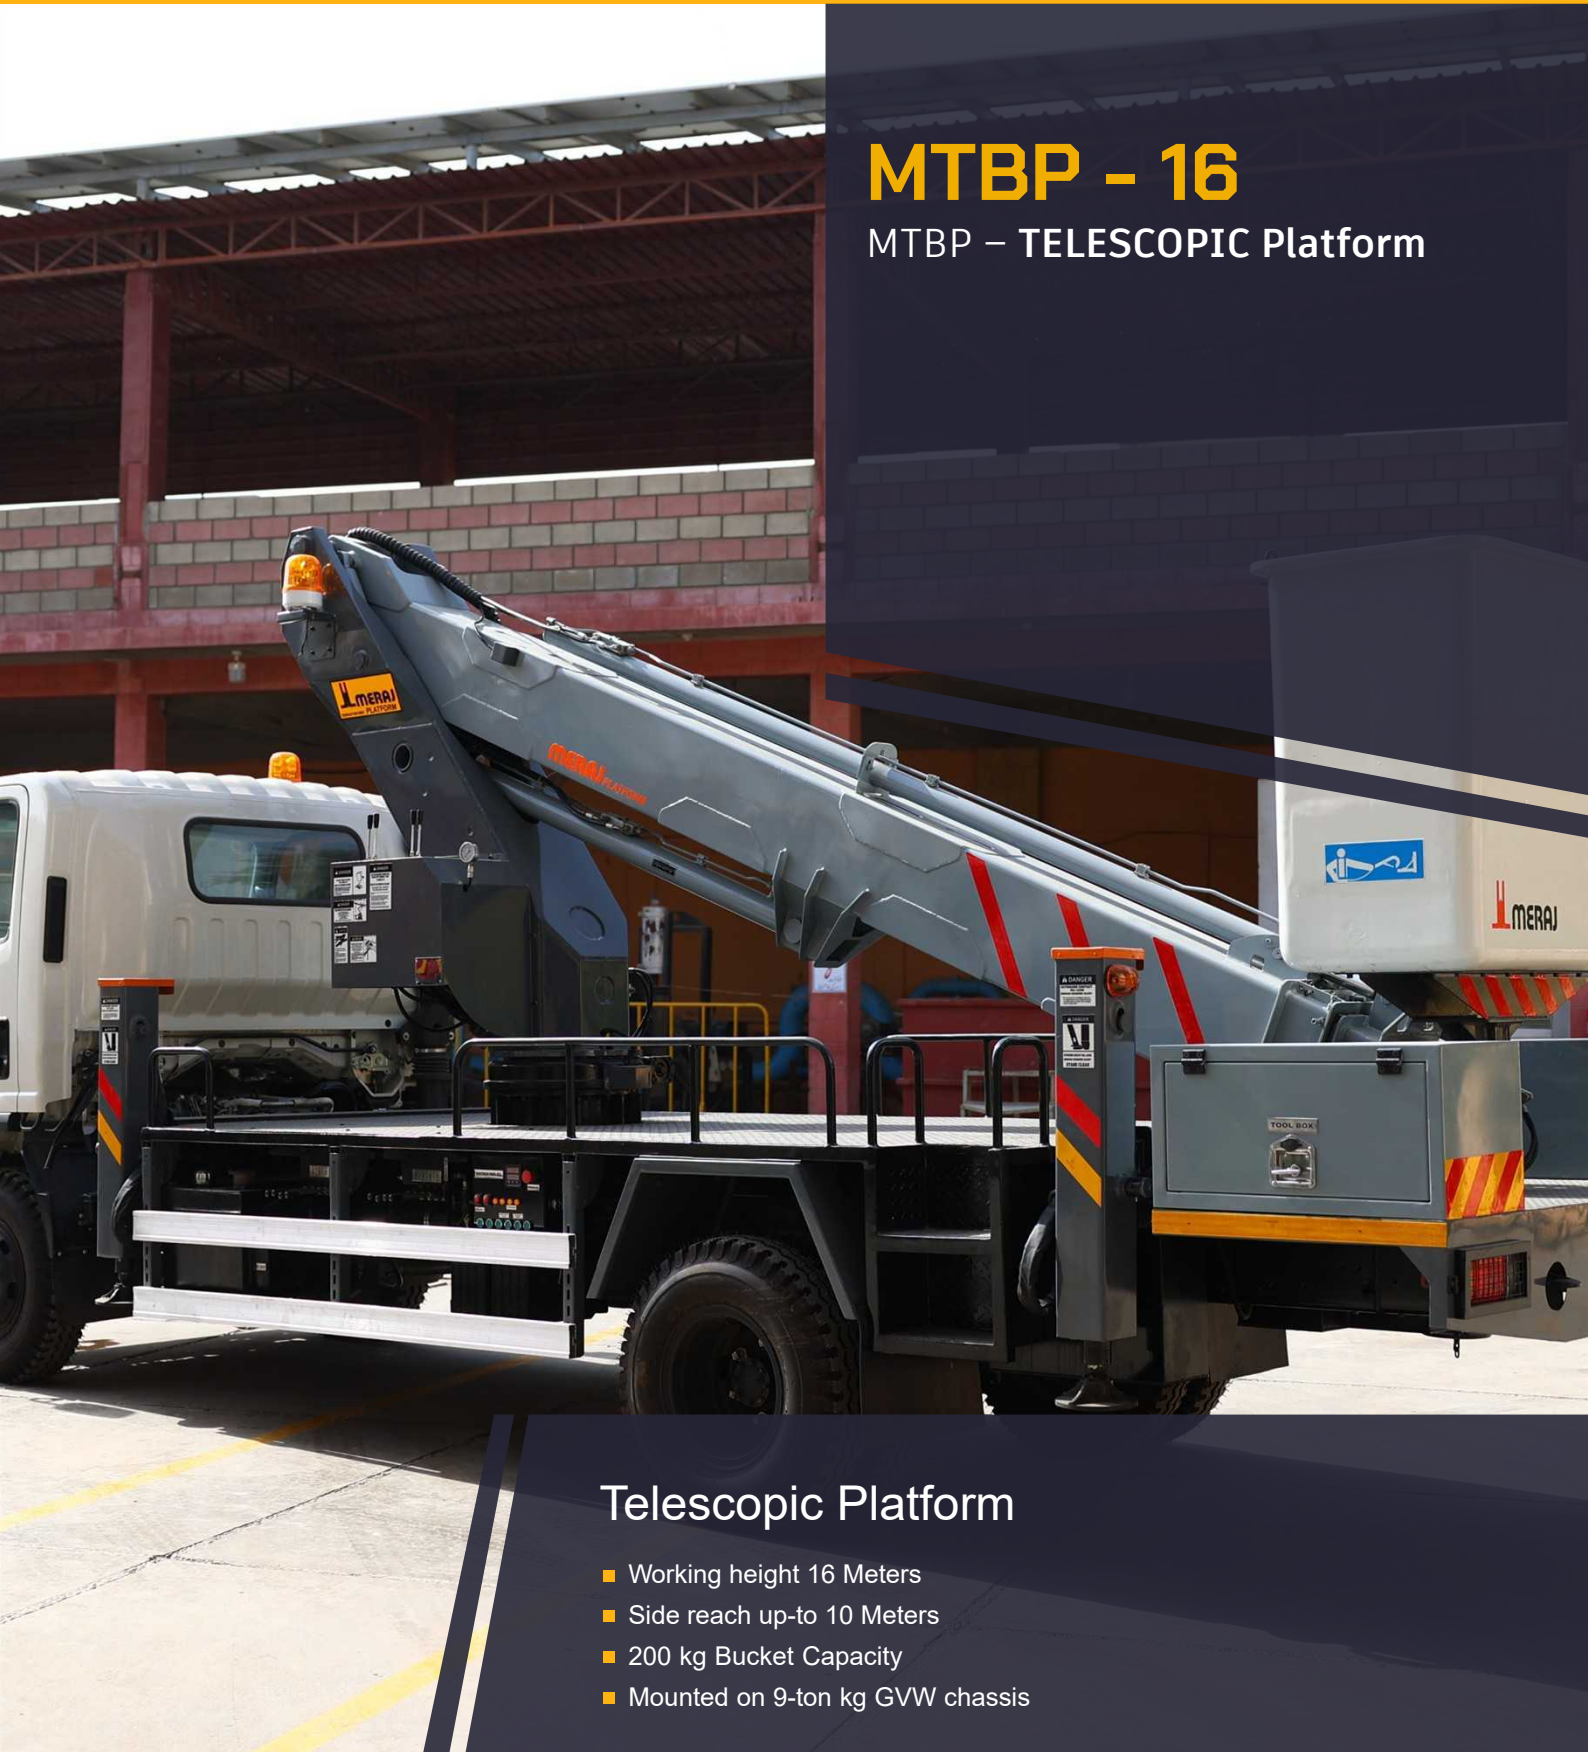



Telescopic Platform

- Working height 16 Meters
- Side reach up-to 10 Meters
- 200 kg Bucket Capacity
- Mounted on 9-ton kg GVW chassis

STANDARD FEATURES

- ✓ Telescopic boom (3 elements: main boom + 2 telescopic extension)
- ✓ Continuous rotation 360 degrees
- ✓ Max. outreach 10 meters (200 kg)
- ✓ Electronic controls in the basket with emergency stop.
- ✓ Engine Start/Stop from control panel and basket
- ✓ Hydraulic controls from the ground, installed on turntable.
- ✓ Overload alarm
- ✓ System to automatically limit the outreach depending on the weight in the basket (M+ system)
- ✓ Ground Egress
- ✓ Ideal for street light maintenance work
- ✓ Fiberglass basket or Aluminum basket
- ✓ Safety Valves against any damage in hydraulic lines
- ✓ Actuated Warning Light System when boom is operational
- ✓ Safety at maximum load and lateral outreach
- ✓ 60° right + 60° left hydraulic rotating basket.
- ✓ Automatic basket leveling.
- ✓ Emergency manual pump.
- ✓ Internally installed electrical and hydraulic hoses

WORKING ENVELOPE

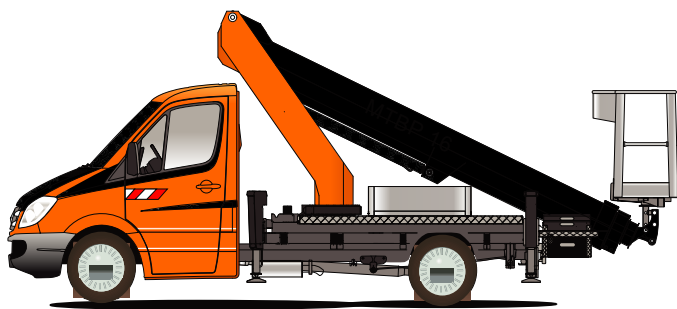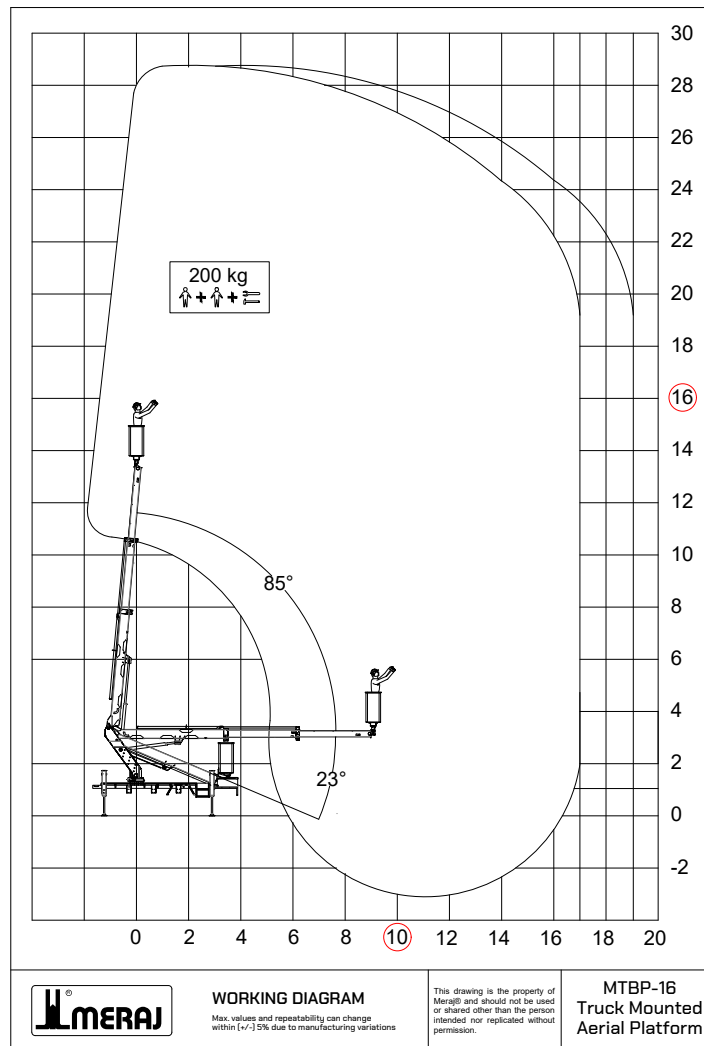

AVAILABLE OPTIONS

- 12V or 24V electric system
- Working light in the basket
- 230V AC electric socket in the basket
- Hydraulic outlet available at basket for hydraulic tools

Contact

MERAJ Limited

Plot No 11, Sector 15,
Korangi Industrial Area,
Karachi-74900, Pakistan.

Tel: +9221-35050145/6
Fax: +9221-35060663
E-mail: sales@meraj.com

PERFORMANCE

	Working height	16,00 m		Total length of vehicle	6,44 m***
	Lifting height	14,00 m		Perm. siting inclination	5°**
	Outreach	10,00 m*		Perm. total weight ≥	8.500 kg
	Size of working cage*	1,22 x 0,61 m		Range of rotation	360°
	Working cage load	200 kg		Wheelbase Carrier chassis	3,80 m

* depending on load, angle of rotation and outfit

** with restriction of performance data

*** Depending on the chassis model

Special Application Trucks & Pumps | Since 1976

www.meraj.com