

MTBP - 18 (Kit)

MTBP – TELESCOPIC Platform




Telescopic Platform

- Working height 18 Meters
- Side reach up-to 12 Meters
- 200 kg Bucket Capacity
- Kit designed for 7000 kg GVW chassis

STANDARD FEATURES

- ✓ Telescopic boom (3 elements: main boom + 2 telescopic extension)
- ✓ 360 degrees rotation
- ✓ Max. outreach 12 meters (200 kg)
- ✓ Electronic controls in the basket
- ✓ Engine Start/Stop from control panel
- ✓ Hydraulic controls from the ground, installed on turntable
- ✓ Overload alarm
- ✓ System to automatically limit the outreach depending on the weight in the basket (M+ system)
- ✓ Ground Egress
- ✓ Ideal for street light maintenance work
- ✓ Standard glass filled nylon base with Poly Liner able to withstand 50 kV for 1 min
- ✓ Basket size (L x W x H) 1220 x 610 x 1067 mm
- ✓ Safety Valves against any damage in hydraulic lines
- ✓ Actuated Warning Light System when boom is operational
- ✓ Safety at maximum load and lateral outreach
- ✓ 60° right + 60° left hydraulic rotating basket
- ✓ Automatic basket leveling
- ✓ Emergency manual pump
- ✓ Internally installed electrical and hydraulic hoses

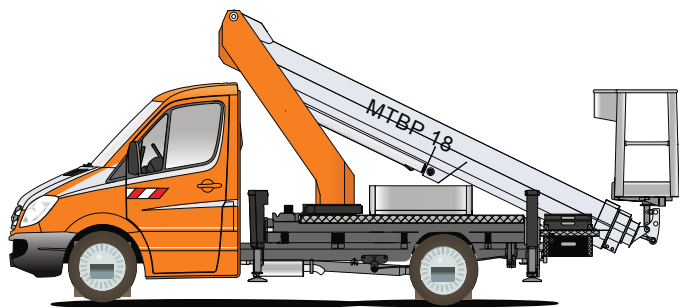

AVAILABLE OPTIONS

- 12V or 24V electric system
- Working light in the basket
- 230V AC electric socket in the basket

Contact

MERAJ Limited

Plot No. 11, Sector 15,
Korangi Industrial Area,
Karachi 74900 - Pakistan

Tel: +9221-1110-MERAJ


Fax: +9221-35060663

E-mail: sales@meraj.com

www.meraj.com

Text and photos are non-binding. The photos may show extra optionals only available at extra charge. The right to change make changes in accordance with technical progress is retained.

WORKING ENVELOPE

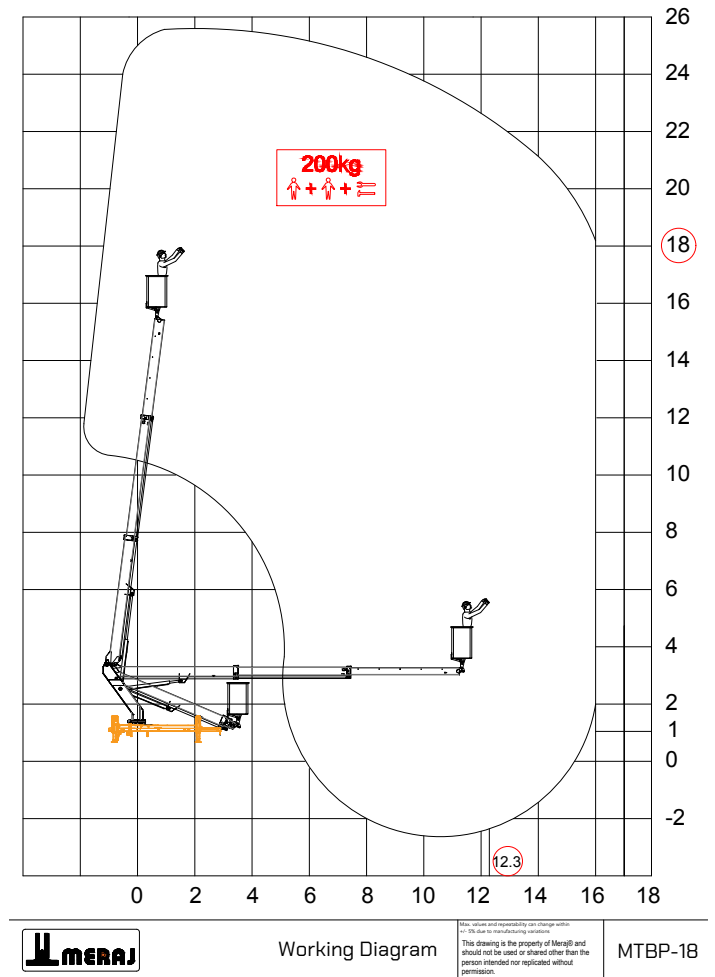

PERFORMANCE

	Working height	18,00 m		Total length of vehicle	6,44 m***
	Lifting height	16,50 m		Perm. siting inclination	5°**
	Outreach	12,00 m*		Perm. total weight ≥	6.000 kg
	Size of working cage	1,22 x 0,61 m		Range of rotation	360°
	Working cage load	200 kg*		Wheelbase Carrier chassis	3,60 m***

* depending on load, angle of rotation and outfit

** with restriction of performance data

*** Depending on the chassis model

Special Application Trucks & Pumps | Since 1976